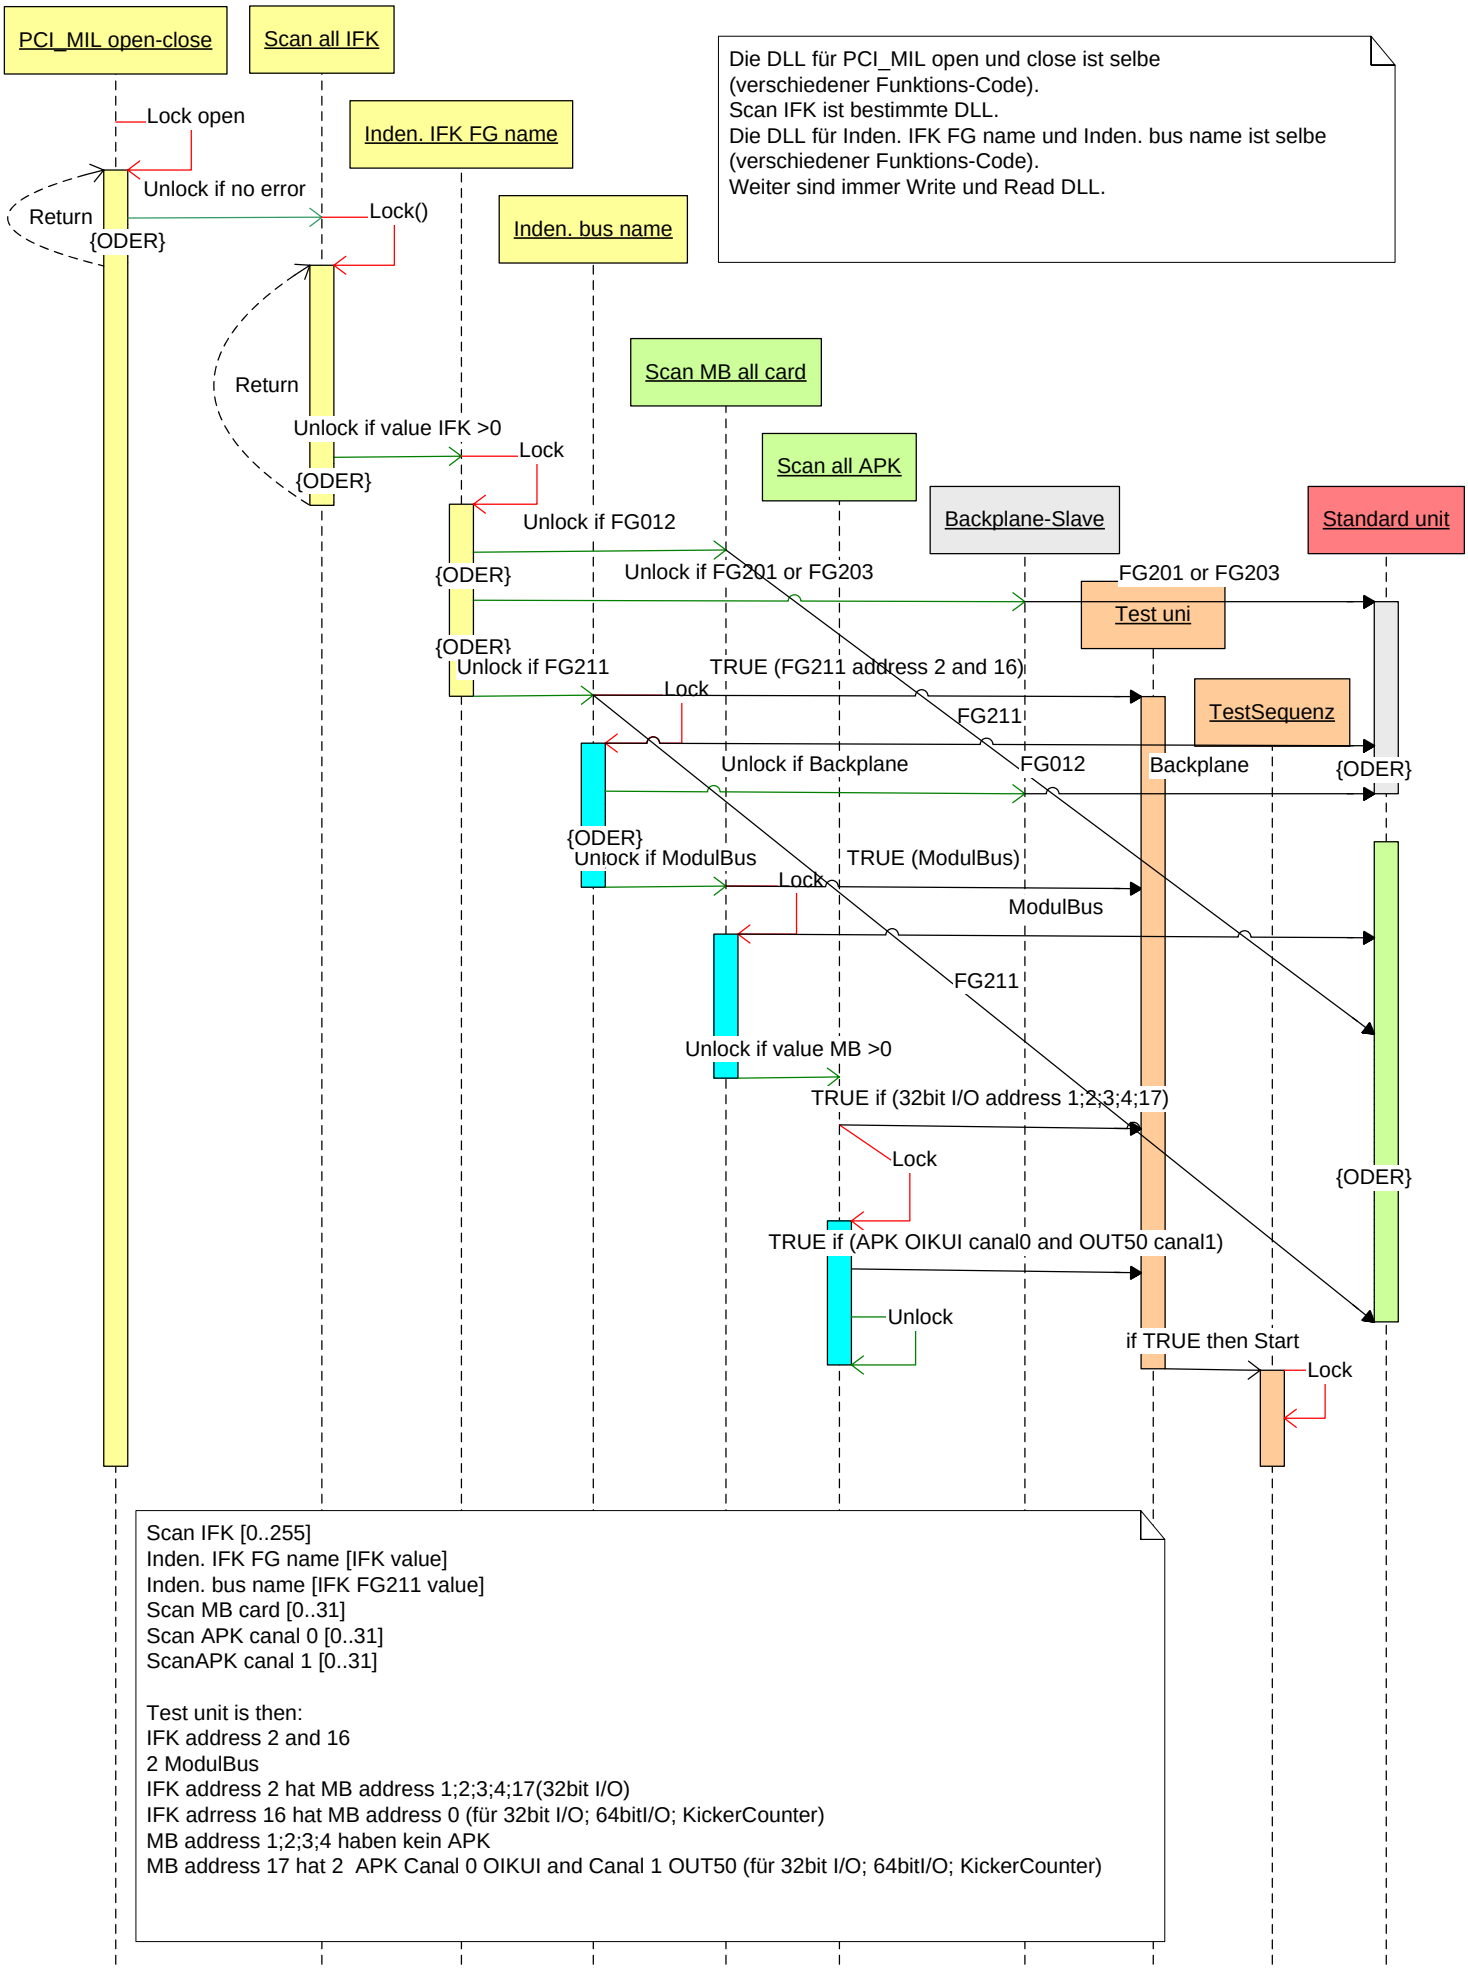
PCI_MIL open-close
Scan all IFK
Inden. IFK FG name
Inden. bus name
Scan MB all card
Scan all APK
Backplane-Slave
Standard unit
Test uni
TestSequenz
Die DLL für PCI_MIL open und close ist selbe
(verschiedener Funktions-Code).
Scan IFK ist bestimmte DLL.
Die DLL für Inden. IFK FG name und Inden. bus name ist selbe
(verschiedener Funktions-Code).
Weiter sind immer Write und Read DLL.
Lock open
Unlock if no error
Return
{ODER}
Lock()
Return
Unlock if value IFK >0
{ODER}
Lock
Unlock if FG012
{ODER}
Unlock if FG201 or FG203
FG201 or FG203
{ODER}
Unlock if FG211
TRUE (FG211 address 2 and 16)
Lock
FG211
Unlock if Backplane
FG012
Backplane
{ODER}
{ODER}
Unlock if ModulBus
TRUE (ModulBus)
Lock
ModulBus
FG211
Unlock if value MB >0
TRUE if (32bit I/O address 1;2;3;4;17)
Lock
{ODER}
TRUE if (APK OIKUI canal0 and OUT50 canal1)
Unlock
if TRUE then Start
Lock
Scan IFK [0..255]
Inden. IFK FG name [IFK value]
Inden. bus name [IFK FG211 value]
Scan MB card [0..31]
Scan APK canal 0 [0..31]
ScanAPK canal 1 [0..31]
Test unit is then:
IFK address 2 and 16
2 ModulBus
IFK address 2 hat MB address 1;2;3;4;17(32bit I/O)
IFK adrress 16 hat MB address 0 (für 32bit I/O; 64bitI/O; KickerCounter)
MB address 1;2;3;4 haben kein APK
MB address 17 hat 2 APK Canal 0 OIKUI and Canal 1 OUT50 (für 32bit I/O; 64bitI/O; KickerCounter)